


- Basic QoS Lab -

Configuring Basic QoS - Lab

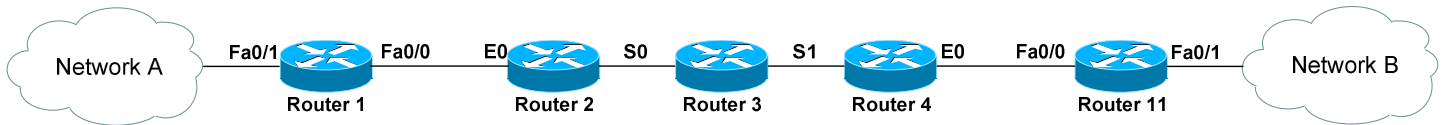

Basic Objectives:

1. Configure and cable the Serial and Ethernet interfaces as indicated in the above diagram.
2. Configure IP addresses between the routers using the following 192.168.YY.x/24 scheme:

Router 1 – Network A = 192.168.123.x

Router 3 – 4 = 192.168.34.x

Router 1 – 2 = 192.168.12.x

Router 4 – 11 = 192.168.114.x

Router 2 – 3 = 192.168.23.x

Router 11 – Network B = 192.168.255.x


3. Configure a loopback interface on each router. The interface should have an address using the following scheme: Y.Y.Y.Y/24. For example, Router 4's loopback should be 4.4.4.4/24.

* * *

All original material copyright © 2007 by Aaron Balchunas (aaron@routeralley.com), unless otherwise noted. All other material copyright © of their respective owners.

This material may be copied and used freely, but may not be altered or sold without the expressed written consent of the owner of the above copyright. Updated material may be found at <http://www.routeralley.com>.

Configuring Basic QoS – Lab (continued)

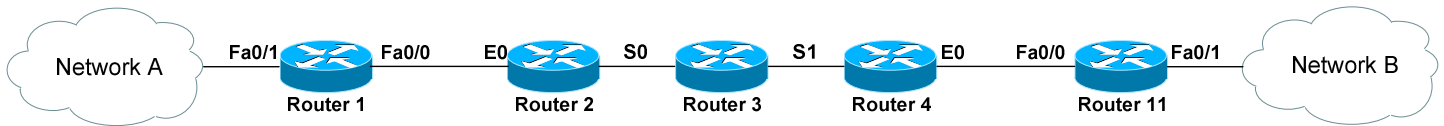

Routing Objectives:

4. Configure RIPv2 routing on all routers. Ensure that routes are not automatically summarized.

5. Configure a host in NetworkA and a host in NetworkB, and confirm end-to-end connectivity.

6. Install the Apache webserver software on each host. The instructor will provide access to the software. Confirm HTTP access between each host.


Note: The two hosts will be referred to as WebserverA and WebserverB throughout the remainder of this lab.

* * *

All original material copyright © 2007 by Aaron Balchunas (aaron@routeralley.com), unless otherwise noted. All other material copyright © of their respective owners.

This material may be copied and used freely, but may not be altered or sold without the expressed written consent of the owner of the above copyright. Updated material may be found at <http://www.routeralley.com>.

Configuring Basic QoS – Lab (continued)

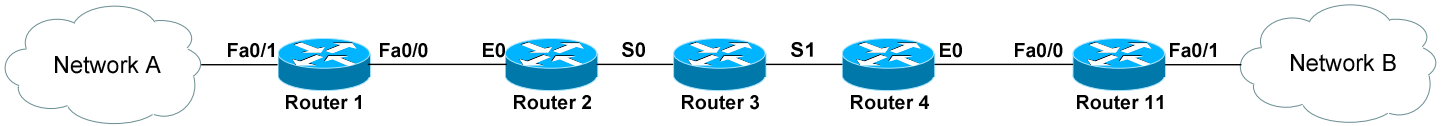

QoS Marking Objectives:


- 7. Configure Router1 to mark *ICMP* traffic from WebserverA to WebserverB with an IP Precedence of 2.

- 8. Configure Router1 to mark *HTTP* traffic from WebserverA to WebserverB with an IP Precedence of 4.

- 9. Use a packet-sniffer to confirm that the appropriate traffic is marked from WebserverA to WebserverB.

* * *

Configuring Basic QoS – Lab (continued)

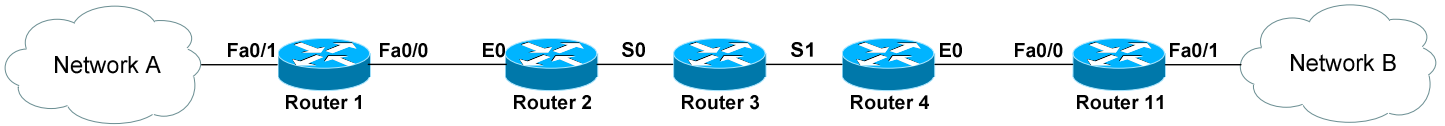

QoS Marking Objectives (continued):

10. Configure Router11 to mark *ICMP* traffic from WebserverB to WebserverA with a DSCP value of AF23.


11. Configure Router11 to mark *HTTP* traffic from WebserverB to WebserverA with a DSCP value of AF31.

12. Use a packet-sniffer to confirm that the appropriate traffic is marked from WebserverB to WebserverA.

13. Use the appropriate *show* command on your router to determine the queuing method in use on each interface.

* * *

Configuring Basic QoS – Lab (continued)

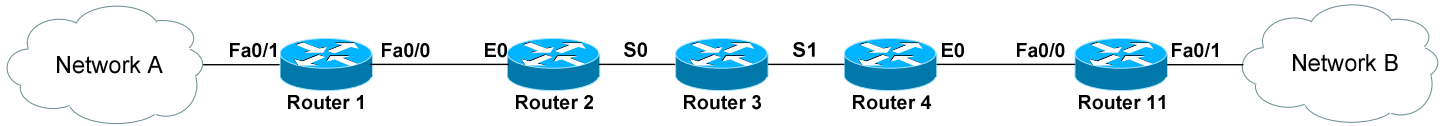

QoS Legacy Queuing Objectives:

14. On all interfaces that end with a *1* (i.e., fa0/1 or s1), configure Priority queuing. Place HTTP traffic into the High queue, and all other IP traffic into the Normal queue.

15. Use the appropriate *show* command to confirm that Priority queuing is configured on the appropriate interfaces.

16. On all interfaces that end with a *0* (i.e., fa0/0 or s0), configure Custom queuing. Place HTTP traffic into the Queue 1, and all other IP traffic into the Queue 2. Set a byte-count limit of 4000 on Queue 1, and a packet-limit of 40. Set a byte-count limit of 2000 on Queue 2, and a packet-limit of 30.


17. Use the appropriate *show* command to confirm that Custom queuing is configured on the appropriate interfaces.

* * *

All original material copyright © 2007 by Aaron Balchunas (aaron@routeralley.com), unless otherwise noted. All other material copyright © of their respective owners.

This material may be copied and used freely, but may not be altered or sold without the expressed written consent of the owner of the above copyright. Updated material may be found at <http://www.routeralley.com>.

Configuring Basic QoS – Lab (continued)

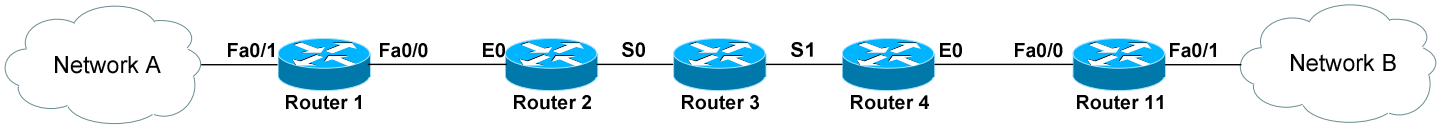

QoS CBWFQ Objectives:

18. Remove all Priority or Custom Queuing configuration from the previous objectives.

19. On all Router 2, Router 3, and Router 4 interfaces, configure Class-Based Weighted Fair Queuing (CBWFQ). Ensure that HTTP traffic from WebserverA to WebserverB (and vice versa) is *guaranteed* 35% of the interface’s bandwidth. Ensure that ICMP traffic from WebserverA to WebserverB (and vice versa) is provided with 15% of the interface’s bandwidth.

Note: Accomplish the above without using any access-list statements on Router 2, Router 3, or Router 4.

20. Use the appropriate *show* command to confirm that CBWFQ queuing is configured on the appropriate interfaces.

* * *

All original material copyright © 2007 by Aaron Balchunas (aaron@routeralley.com), unless otherwise noted. All other material copyright © of their respective owners.

This material may be copied and used freely, but may not be altered or sold without the expressed written consent of the owner of the above copyright. Updated material may be found at <http://www.routeralley.com>.